

Product Datasheet

LED Street Luminaire (250w)



Areas of applications

- Local Roads.
 - Express Roads.
 - Town Roads.
 - Residential Area Roads.
 - Pedestrian crossings.
 - Parking areas.
-

Product Features

- Luminaire efficacy up to 130 Lm/W.
 - Life time 50 K hours (L80).
 - Class I Protection.
 - Ingress Protection: IP66.
 - Failure rate less than 10%
 - High Pressure Die Cast Aluminum.
-



LUMILEDS





Technical Data

Manufacturer	Storm Electric (Storm LED)	
Input Power	250 W	
Input Voltage Range	100 – 277 Vac	
Power Factor	≥ 0.95	
Input Current	< 2.5 A	
Total Harmonic Distortion (THD)	≤ 10%	
Frequency Range	50-60 HZ	
Driver	DONE LED Driver	
Driver Efficiency	≥ 90%	
Luminaire Efficacy	120 - 130 lm/w	
LED Type	Lumileds	
Output Lumen	30000 - 32500 lm	
Color Rendering Index (CRI)	Ra ≥ 80	
Color Temperature (CCT)	3000 K – 6500 K	
SDCM	1-3 Steps	
Beam Angle	120°	
Ambient Temperature & Humidity	-40°C to 60°C 20% to 95%	
Protection	Surge Protection 6 KV	
Ingress Protection	IP66	
Fixture Weight	6.97 Kg	
Order Code	(3000k)	SLG-250W-30L-D5-V2
	(4000k)	SLG-250W-40L-D5-V2
	(5000k)	SLG-250W-50L-D5-V2
	(6500k)	SLG-250W-65L-D5-V2

Notes: Luminaire power may be (±10%) of rated power & lumen may be (-10%) of rated lumen according to Standard (IEC 62717)

Dimension

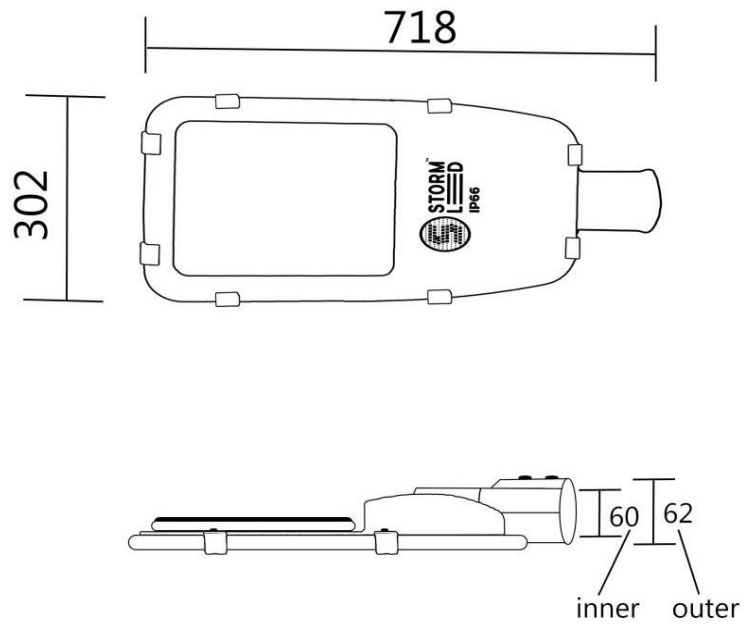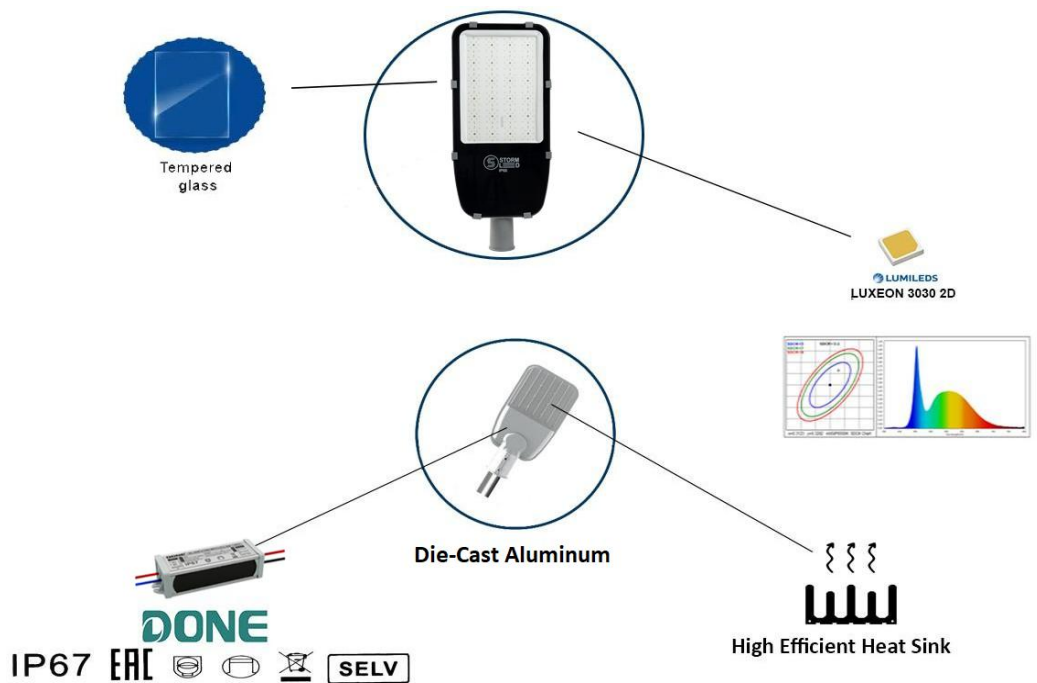

Made in Egypt