STORM LED®

PRODUCTS CATALOGUE

Long Life Lighting

STORM ELECTRIC

Address:

Factory And Administration: 10th Of Ramadan
Third Industrial - Zone A1 - Block IXQ

HOTLINE: 17902
MOP: 01040705706

Branches:

- 10th Of Ramadan - jordanian - egyption center 1 - Exhibition No.58 - 97 -98
- 6th of October City - Laylat Al-Qadr, New Complex, Building B Osman Abaza St.30 Blocks 153 & 154
- Alexandria - Osman Abaza St.30 Stock Exchange Sq., El-Sabaa Banat Ext

Sadat: Hertz Electric - The Second District
Services Hub Building No.12 - Showroom No.1

info@stormelectric.org
fb\stormelectriceg
Linkedin.com\company\stormelectriceg
www.stormelectric.org

OUR COMPANY

ESTABLISHED IN 2010

- We`re a pioneer and distinct company in producing various LED electrical Luminaires.
- We also can install and maintain electrical supplies through cooperative team of expert engineers and technicians.
- All we do based on quality at the first place!

Our Current Mission

- Providing super and exceptional lighting services with an international quality to our clients.
- Offer a suitable environment to enhance the efficiency products in the market.

17902

STORM LED

OUR COMPANY

ESTABLISHED IN 2010

Our Future Vision

- Increase our company capacity of lighting products units in a short time.
- To be recognized as the best lighting supplies and system provider in Egypt.
- Increase customer satisfaction and trust through implement quality assurance coinciding with international standard.

80 % Energy saving



Anti Glare

50000
ساعة تشغيل

IP 66 Water proof

ISO 9001 : 2015

Flicker Free

17902

STORM LED

LED STREET LIGHT

SLP - 100W - L - S

Guarantee 3 Years

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100 W

- 50000 HRS
- 120:130 LM\W
- **-30 C to +55 C**
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- **120**

LED STREET LIGHT

SLP - 150W - L - S

Guarantee 3 Years

- 150W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 120:130 LM\W
- **-30 C to +55 C**
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- **120**

LED STREET LIGHT

SLP - 100W - L - P

Guarantee 5 Years

- 100 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100 W

- 50000 HRS
- 130 : 140 LM/W
- **-40 C to +55 C**
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- **120**

LED STREET LIGHT

SLP - 150W - L - P

Guarantee 5 Years

- 150W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 130 : 140 LM/W
- **-40 C to +55 C**
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- **120**

LED STREET LIGHT

SLG-50 W - L - D - V1

Guarantee 3 Years

- 50W
- P.F >= 0.95
- DONE LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

50 W

- 50000 HRS
- 120:130 LM\W
- -40 C to +60 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 60/120

LED STREET LIGHT

SLG-100 W - L - D - V1

Guarantee 3 Years

- 100W
- P.F >= 0.95
- DONE LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100 W

- 50000 HRS
- 120:130 LM\W
- -40 C to +60 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 60/120

LED STREET LIGHT

SLG-150 W - L - D - V2

Guarantee 3 Years

- 150W
- P.F >= 0.95
- DONE LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 120:130 LM\W
- -40 C to +60 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 120

LED STREET LIGHT

SLG-200 W - L - D - V2

Guarantee 3 Years

- 200W
- P.F >= 0.95
- DONE LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200 W

- 50000 HRS
- 120:130 LM\W
- -40 C to +60C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 120

LED STREET LIGHT

SLG-250 W - L - D - V2

Guarantee 3 Years

- 250W
- P.F >= 0.95
- DONE LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

250 W

- 50000 HRS
- 120:130 LM\W
- -40 C to +60 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 120

LED STREET LIGHT

SLG-100 W - L - P - V1

Guarantee 5 Years

- 100W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 60/120

LED STREET LIGHT

SLG-150 W - L - P - V1

Guarantee 5 Years

- 150W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 60/120

LED STREET LIGHT

SLG-200 W - L - P - V1

Guarantee 5 Years

- 200W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass \ IK08
- Die-cast Aluminum
- 60/120

LED FLOOD LIGHT

FLP -100W - E - S

Guarantee 3 Years

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100 W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP -150W - E - S

Guarantee 3 Years

- 150 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 200W - E - S

Guarantee 3 Years

- 200 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200 W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 250W - E - S

Guarantee 3 Years

- 250 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

250 W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 100W - L - P

Guarantee 5Years

- 100 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

- 50000 HRS
- 130:140 LM\W
- -40 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

100 W

LED FLOOD LIGHT

FLP - 150W - L - P

Guarantee 5 Years

- 150 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 200W - L - P

Guarantee 5 Years

- 200 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 250W - L - P

Guarantee 5 Years

- 250 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

250 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 400 W - L - P

Guarantee 5 Years

- 400 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

400 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLP - 500 W - L - P

Guarantee 5 Years

- 500 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

500 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLG - 30W - E - S

Guarantee 3 Years

- 30 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

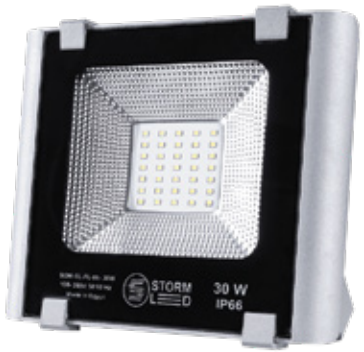

30W

- 50000 HRS
- 120:130 LM\W
- -30 C to +45 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLG - 50 W - E - S

Guarantee 3 Years

- 50 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

50W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLG - 100 W - E - S

Guarantee 3 Years

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

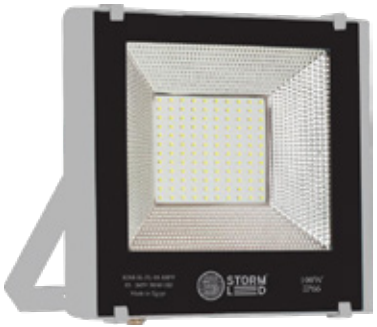

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

100W

LED FLOOD LIGHT

FLG - 150 W - E - S

Guarantee 3 Years

- 150 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K



150W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLG - 200 W - E - S

Guarantee 3 Years

- 200 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD LIGHT

FLG - 300 W - L - P

Guarantee 5 Years

- 300 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

300W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 90

LED FLOOD LIGHT

FLG - 400 W - L - P

Guarantee 5 Years

- 400 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

400W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 90

LED FLOOD LIGHT

FLG - 500 W - L - P

Guarantee 5 Years

- 500 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

500W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 90

LED FLOOD LIGHT

FLG - 600 W - L - P

Guarantee 3 Years

- 600 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

600W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 90

LED FLOOD-LIGHT

FLG - 100W - S - S - V2

Guarantee 3 Years

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SANAN
- IP 65
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100W

- 50000 HRS
- 120 LM\W
- -5 C to +45 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD-LIGHT

FLG - 150W - S - S - V2

Guarantee 3 Years

- 150 W
- P.F >= 0.95
- STORM LED DRIVER
- SANAN
- IP 65
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150W

- 50000 HRS
- 120 LM\W
- -5 C to +45 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD-LIGHT

FLG - 200W - S - S - V2

Guarantee 3 Years

- 200 W
- P.F >= 0.95
- STORM LED DRIVER
- SANAN
- IP 65
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200W

- 50000 HRS
- 120 LM\W
- -5 C to +45 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD-LIGHT

FLG - 250W - S - S - V2

Guarantee 3 Years

- 250 W
- P.F >= 0.95
- STORM LED DRIVER
- SANAN
- IP 65
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

250W

- 50000 HRS
- 120 LM\W
- -5 C to +45 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

LED FLOOD-LIGHT

FLG - 300W - S - S - V2

Guarantee 3 Years

- 300 W
- P.F >= 0.95
- STORM LED DRIVER
- SANAN
- IP 65
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

- 50000 HRS
- 120 LM\W
- -5 C to +45 C
- CRI >80
- Clear Glass
- Die-cast Aluminum
- 120

300W

LED CANOPY LIGHT

CLP - 100W - L - P

Guarantee 5 Years

- 100 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED CANOPY LIGHT

CLP - 150W - L - P

Guarantee 5 Years

- 150 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030/ LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150W

- 50000 HRS
- 130:140 LM\W
- -40 C to +55 C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED CANOPY LIGHT

CLP - 100W - E - S

Guarantee 3 Years

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED CANOPY LIGHT

CLP - 150W - E - S

Guarantee 3 Years

- 150 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 2835 / EPISTAR
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150W

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Unbreakable Polycarbonate
- Die-cast Aluminum
- 120

LED HIGHBAY LIGHT

HBP-100W - L - PH

Guarantee 5 Years

- 100 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

100W

- 50000 HRS
- 130:140 LM\W
- -40 C to +60 C
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- 120

LED HIGHBAY LIGHT

HBP - 150W - L - PH

Guarantee 5 Years

- 150 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 3030\LUMILEDS
- IP 66
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

150 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +60 C
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- 120

LED HIGHBAY LIGHT

HBP - 200W - L - PH

Guarantee 5 Years

- 200W
- PHILIPS LED DRIVER
- P.F >= 0.95
- SMD 3030\LUMILEDS
- IP66
- CCT:3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

200 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +60 C
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- 120

LED HIGHBAY LIGHT

HBP - 250W - L - PH

Guarantee 5 Years

- 250W
- PHILIPS LED DRIVER
- P.F >= 0.95
- SMD 3030\LUMILEDS
- IP66
- CCT:3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

250 W

- 50000 HRS
- 130:140 LM\W
- -40 C to +60 C
- CRI >80
- Unbreakable polycarbonate
- Die-cast Aluminum
- 120

LED PANEL LIGHT

PL - 44 W - E - P

Guarantee 3 Years

- 44 W
- P.F >= 0.95
- PHILIPS LED DRIVER
- SMD 2835 / EPISTAR
- IP 20
- CCT:3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

44 W

- 30000 HRS
- 100:110 LM\W
- CRI >80
- polycarbonate Lens-Anti glare
- 120

LED PANEL LIGHT

PL - 48 W - E - D

Guarantee 3 Years

- 48W
- DONE LED DRIVER
- P.F >= 0.5
- SMD 2835\EPISTAR
- IP20
- CCT:3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

48 W

- 30000 HRS
- 100:110 LM\W
- CRI >80
- polycarbonate Lens-Anti glare
- 120

DECORATIVE LIGHT CAN BE CUSTOMIZED TO ANY SHAPES ACCORDING TO CUSTOMER DEMAND

LED DECORATIVE POLE

DLP - 50 W - L - S -V1

- 50 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66 FOR MODULE
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Un breakable polycarbonate
- Steel 10 x 10
- Steel 10 x 5
- Aluminum
- 60/90/120

50W

17902

With the option to integrate an led profile upon request

STORM LED

LED DECORATIVE POLE

DLP - 50 W - L - S -V2

- 50 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66 FOR MODULE
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

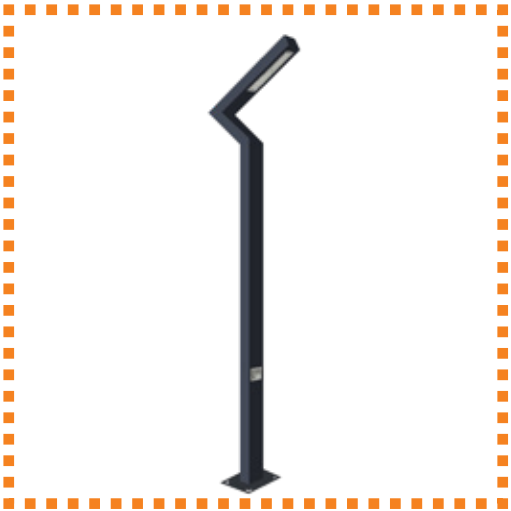

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Un breakable polycarbonate
- Steel 10 x 10
- Steel 10 x 5
- Aluminum
- 60/90/120

50W

LED DECORATIVE POLE

DLP - 100 W - L - S -V1

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66 FOR MODULE
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Un breakable polycarbonate
- Steel 10 x 10
- Steel 10 x 5
- Aluminum
- 60/90/120

100W

17902

With the option to integrate an led profile upon request

STORM LED

LED DECORATIVE POLE

DLP - 100 W - L - S -V2

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66 FOR MODULE
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Un breakable polycarbonate
- Steel 10 x 10
- Steel 10 x 5
- Aluminum
- 60/90/120

100W

With the option to integrate an led profile upon request

LED DECORATIVE POLE

DLP - 100 W - L - S -V3

- 100 W
- P.F >= 0.95
- STORM LED DRIVER
- SMD 3030 / LUMILEDS
- IP 66 FOR MODULE
- CCT: 3000-3500 K
  4000-4500 K
  5000-5500 K
  6000-6500 K

- 50000 HRS
- 120:130 LM\W
- -30 C to +55 C
- CRI >80
- Un breakable polycarbonate
- Steel 10 x 10
- Steel 10 x 5
- Aluminum
- 60/90/120

100W

17902

With the option to integrate an led profile upon request

STORM LED

SUCCESS PARTNERS

السجون الشرقيون
Oriental Weavers

SUCCESS PARTNERS

eco
friendly

Ministry of Electricity & Energy
وزارة الكهرباء والطاقة

حياة
كريمة

RoHS
compliant

الجهاز المركزى للتعمير
Central Agency For Reconstruction
الجهاز التنفيذي لتعمير سيناء

SGM
Sukari Gold Mine News

NPPA
NUCLEAR POWER PLANTS AUTHORITY

ESIIC

Dr. Greiche
GLASS

EGYPT
FOODS
GROUP
a world of snacks

METROTEC
EGYPT

STORM
LED

STORM LED

17902

info@stormelectric.org

fb\stormelectriceg

Linkedin.com\company\stormelectriceg

www.stormelectric.org